



Movement sensor

Product data

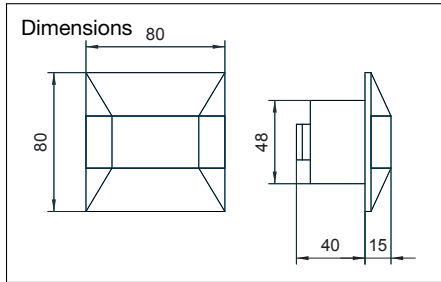

Minilux PIR movement sensor for indoor lighting control. For flush mounting and plate mounting.

- 24 V DC
- Up to 8 sensors on one Control
- Can be wired as for low-voltage
- The front cover determines the detection range
- Mounting at the ceiling and on the wall

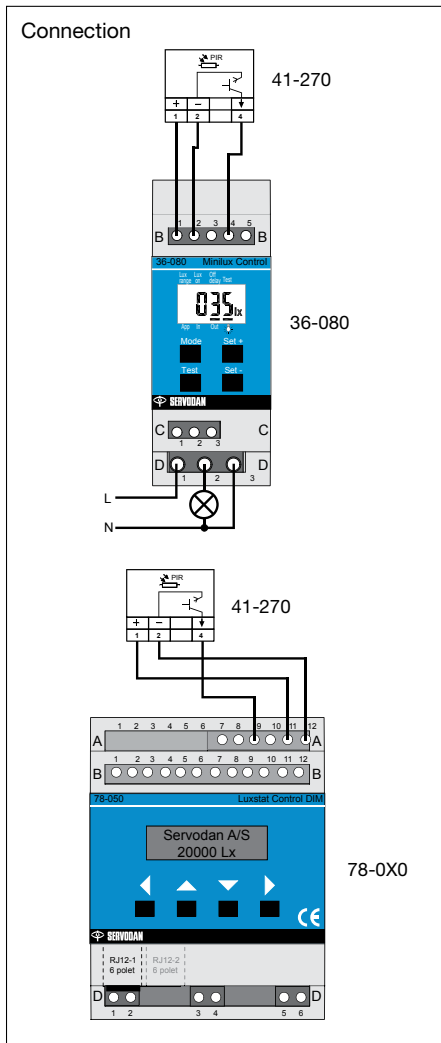

Technical data



Supply voltage	24 V DC ±10%
Output signal	On/Off, NPN
Detection range	90°/40°
Range	0,4...5 m
Max. current load	50 mA (24 V DC)
Power consump. - worst case	<5 mA (24 V DC)
Power consump. - standby	<3 mA (24 V DC)
Protection class	IP20
Ambient temperatur	-20°C...+50°C
Cable length	Max 200 m 2 x 2 x 0,6 mm

The Minilux PIR Sensor 41-270 is a passive infra-red movement sensor which responds to temperature changes and movements by people.



The Minilux PIR Sensor is designed for flush mounting or mounting on a junction box (plate mounting).

If you turn the front cover 90° you get a detection range of 40°.

The bottom part can be rotated, so that it fits for mounting on the wall or at the ceiling.

After connection to the power supply, the Minilux PIR Sensor is ready for operation after 1-2 min. (power-up time).

The Sensor is adapted to the Euro-junction system.

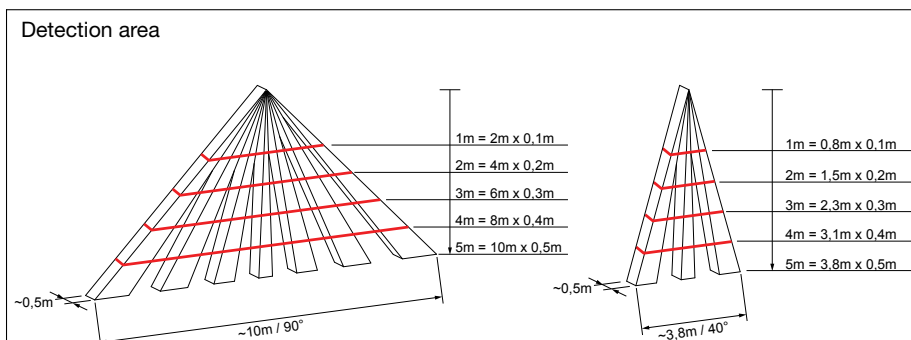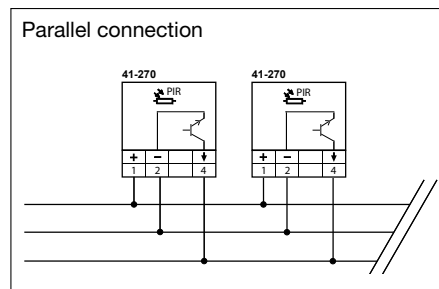

Order number:

Product	Type	EAN no.
Minilux sensor	41-270	5703102 203540

Accessories:

Product	Type	EAN no.
Minilux Control	36-080	5703102 203298
Luxstat On/Off	78-000	5703102 201348
Luxstat Dim	78-050	5703102 201355

Junction for:

- masonry wall	54-903	5703102 001917
- sheet wall	54-904	5703102 001924
- plate mounting	54-905	5703102 001931
Bracket for 54-905	54-906	5703102 001962