

Tri-Zone Dimming Controller

ELED3

Programming Guide



Copyright © 2019 Echoflex Solutions, Inc.
All rights reserved. Product information and specification details subject to change

Echoflex Solutions

38924 Queens Way, Unit #1, Squamish, BC, V8B 0K8, Canada ■ +1 778-733-0111
echoflexsolutions.com ■ 8DC-5810 Rev 1.1 ■ 06/19

*Range Confirmation® is an Echoflex Solutions Inc. Patented technology
Simple Tap™ is a trademark of Echoflex Solutions, Inc. in Canada and other
countries.*

*All other trademarks, both marked and not marked, are the property of
their respective owners.*

*Echoflex intends this document, whether printed or electronic, to be read
in its entirety.*

Table of Contents

Introduction

Document Conventions.....	1
---------------------------	---

Overview

Radio Communications	2
----------------------------	---

Dimming Output.....	3
---------------------	---

Near-Cross Relay Technology	3
-----------------------------------	---

Switch Operation 4

Timed Switches	4
----------------------	---

Occupancy Based Lighting Applications 5

Grace Timer.....	5
------------------	---

Dual Technology Occupancy Sensors.....	5
--	---

Occupancy Sensors and Partial-ON.....	5
---------------------------------------	---

Occupancy Sensors and Partial-OFF.....	6
--	---

Occupancy Sensors with Switches	6
---------------------------------------	---

Daylight Harvesting Application 7

Daylighting Control Override	7
------------------------------------	---

Closed Loop Daylighting Control	8
---------------------------------------	---

Radio Range Confirmation	9
--------------------------------	---

Controller Button Interface

Linking the First Switch.....	10
-------------------------------	----

LEARN button	10
--------------------	----

CLEAR button	11
--------------------	----

Power LED and Learn LED.....	11
------------------------------	----

Disabling the User Interface LEDs	11
---	----

Configuring the Controller

Simple Tap™ Instructions 13

Enable/Disable the Repeater Function	14
--	----

Enable/Disable the Status Telegram.....	14
---	----

Setting Partial-ON	14
--------------------------	----

Setting Partial-OFF 15
Set the Occupancy Sensor Auto-OFF timer 16
Save State 16
Set the Closed Loop Daylighting Set Point..... 17
Set the Open Loop Daylighting Set Point..... 18

Appendix A

LED Blink Codes and Operation 19
 Status Feedback Telegram..... 20
Agency Listings and Regulatory Statements..... 21
 Safety 21
 Energy Code Compliance 21
 Safety Standards Load Ratings 21

Introduction

The Echoflex ELED3 is a wireless lighting controller designed for today's wide selection of LED fixtures. It includes 0-10 volt dimming channels for three individual dimming zones and a robust 20A relay for ON/OFF control of the larger controlled space.

The ELED3 Tri-Zone dimming controller is designed for open office spaces, classrooms, boardrooms, conference rooms, or any space needing multiple dimming zones control.

The controller is a power-pack style lighting controller that operates lights based on room occupancy state, manual switch operation, ambient light levels and gateway commands, implemented through scheduled events or network overrides.

The controller supports both open or closed loop photo sensors assigning two channels as daylighting channels. The primary daylighting channel includes a set point while the secondary channel uses an offset from the set point, both configurable. Using Simple Tap™, the primary daylighting channels set point can be configured based on the extent of outdoor light in the space. The secondary channel will lag the primary channel by the offset value providing consistent dimming results across the space as the natural light changes. The third dimming channel can be controlled by linked occupancy sensors, switches or gateway commands.

Document Conventions

This document includes the following conventions to draw attention to important information.



Note: *Notes are helpful hints or information that supplement the main content.*

Echoflex's user documentation is designed for print or electronic use. Benefits to using the electronic format include using the table of contents to jump to a desired page by clicking on the heading or using word search to find a specific topic.

Cross references highlighted in this document are links to the referenced section of the guide.

Configuration parameters are emphasized throughout the guides content in *italics*. Additionally, button and switch actions (ON/OFF) and relay events (lights ON/OFF) are emphasized throughout this guide in ALL CAPS.

This guide is available for free download from Echoflex Solutions website: www.echoflexsolutions.com

Overview

The ELED3 is a complete stand-alone lighting controller requiring only remote linked devices to provide input on light level, occupancy state and switch operation.

The controller will perform common lighting control applications:

- Vacancy Sensor Mode - partial OFF or fully OFF
- Occupancy Sensor Mode - partial ON or fully ON
- Wall Switch - ON/OFF, manual adjustment of dim level and timed switch
- Daylight Harvesting - open loop or closed loop
- Demand Response - sets a temporary hard limit to the maximum dimming output
- Scheduling via interfaces or gateways

Radio Communications

The ELED3 is a wireless device capable of transmitting and receiving telegrams. The controller supports:

- Telegram repeating, single and dual hop
- Controller status broadcast

Dimming Output

The controller has three 0-10V dimming outputs providing linear, proportional dimming control of a dimming driver or ballast. The maximum and minimum levels of the output can be configured using Garibaldi software.

- *Maximum dimming level* - the high level trim of the dimming output, set to 100% by default
- *Minimum dimming level* - the low level trim of the dimming output, set to 0% by default

The *dimming output* can also be disabled through Garibaldi software allowing for immediate relay control of the lights.

Near-Cross Relay Technology

The ELED3 monitors the AC voltage waveform so it operates the relay, either open or closed, when the waveform is close to zero. This prevents carbon build-up on the relay contacts ensuring the controller will continue to provide trouble-free operation for years.

Switch Operation



Note: *The parameters discussed in this section are configurable. Refer to [Configuring the Controller](#) for more details on accessing these parameters.*

The controller operates with single and dual-paddle wall, wave, multi-button and hand-held Echoflex switches. A switch can be linked to all channels or an individual channel.

A quick press ON action activates the relay closed (lights on) and the linked dimming output will ramp to the last manually set dim level for that output. A quick double-press ON will fade up to maximum dimming level and accelerate the fade period to ½ second. A quick press OFF action will fade the lights down to the minimum dimming level and then open the relay (lights off). A quick double-press OFF will accelerate the fade period to ½ second.

Echoflex switches can also be used as dimmer switches. Press and hold the ON or OFF side to modulate the dimming output up to the maximum dimming level or down to the minimum dimming level.

Timed Switches

The controller can be configured so any linked single or dual paddle switch becomes a *timed switch*. A switch ON closes the relay (lights on) and the timed switch timer is set. One minute before the timer expires, there will be a flick-warn (lights quick OFF then ON) to warn occupants of the pending OFF event. Once the timer expires, the relay opens (lights off). The timer can be reset at any time by pressing a linked switch ON. A switch OFF event clears the timer and turns the lights OFF. The *time period* is configurable using Garibaldi software.

Occupancy Based Lighting Applications



Note: *The parameters discussed in this section are configurable. Refer to [Configuring the Controller](#) for more details on accessing these parameters.*

The controller will turn the lights OFF or fade down to a preset level when there is no motion detected in the room indicated by all linked occupancy sensors.

There is a configurable *time period* that must expire first before the controller completes the vacancy action. The *occupancy auto-off timer* is set to 15 minutes by default but can be changed using [Simple Tap™ Instructions](#) or Garibaldi software.

Grace Timer

The controller includes a *grace timer* that starts counting down once the vacancy action has been activated. The *grace timer* is a short period of time allowing an occupant to return the lights to the previous occupied state; either through motion detection or audio input in the case of dual-tech sensors.

Dual Technology Occupancy Sensors

Echoflex dual technology sensors have built-in occupancy timers that manage the transition from occupied to the vacant state. The controller should be configured to allow the dual-tech sensor control of the vacancy action by setting the controllers occupancy *auto-off timer* to 0 seconds. To change this timer, refer to the [Simple Tap™ Instructions](#).

Occupancy Sensors and Partial-ON

When only occupancy sensors are linked to the controller, the sensor will automate the lights both ON and OFF. The dimming output for the ON action will adjust to the *partial-ON dimming level* (default 100%). This value is configurable to accommodate partial-ON applications using [Simple Tap™ Instructions](#) or Garibaldi software.

Partial-ON is enabled or disabled concurrently for all channels of the controller. Each of the three channels has separate configuration parameters for the *partial-ON value*.

Occupancy Sensors and Partial-OFF

If the application requires the lights to remain ON during vacant periods but at a dimmed level (partial-OFF), the *partial-OFF dimming level* configuration property accessible using [Simple Tap™ Instructions](#). or Garibaldi software can enable this feature.

Partial-OFF is enabled or disabled concurrently for all channels of the controller. Each of the three channels has separate configuration parameters for the partial-OFF value.

Occupancy Sensors with Switches

When switches and sensors are linked, the controller will assume manual-ON, auto-OFF operation referred to as *Vacancy Sensor Mode*. The controller can be configured to turn the lights ON immediately with motion (*partial-ON*) using [Simple Tap™ Instructions](#) or Garibaldi software .

When the switch is used by pressing on or off, this action will reset the *occupancy auto-off timer* and set the sensor state to occupied.

Daylight Harvesting Application



Note: *The parameters discussed in this section are configurable. Refer to [Configuring the Controller](#) for more details on accessing these parameters.*

The controller will modulate the light intensity from dimming fixtures based on the ambient light level in the room when a photo sensor is linked to the controller. When daylighting is active and is driving the two outputs, a switch, gateway command or occupancy sensor cannot force the light level higher. However a switch, occupancy sensor or gateway command can override the light OFF or dim below the *daylighting control value*.

The fixture's closest to the natural light source must be connected to channel one, the primary daylighting channel. If the space has a secondary daylighting zone, the fixtures in the zone must be connected to channel two, the secondary daylighting channel. Channel three does not perform any daylighting routine.



Note: *The controller will only allow 1 linked photo sensor*

The daylighting control application has several configuration variables and serves two separate functions, closed loop control or open loop control:

- *Daylighting closed loop set point, dead-band, and maximum change rate*
- *Daylighting open loop maximum and minimum set points plus time period for dimming full scale range*
- The secondary daylighting channel's (2) *offset value* from channel one

Daylighting Control Override

The open or closed loop daylighting features can be temporarily overridden by enabling the *daylighting override* configuration parameters. The override has a *timer* that will release the override once expired and daylighting control will resume.

When the *override* is enabled, a switch can operate the relay ON and manually set the dimming level.

Both the *daylighting override timer* and *override enable* parameters are accessible with Garibaldi software.

Closed Loop Daylighting Control

Closed loop daylighting becomes active when a photo sensor with a maximum detectable range of light less than 2500 lux is linked to the controller. Closed loop daylighting applications are defined when the sensor indirectly monitors the controlled light output from the fixtures plus some of the natural lights contribution.

When the lights are on, closed loop daylighting will try to maintain a given set point level within the space. This level is specified in the *closed loop daylighting set point* configuration parameter. The controller only adjusts the dimming output upon received photo sensor telegrams and only when the relay is closed. If the relay is open, closed loop daylighting is ignored. The *closed loop daylighting set point* is adjustable using [Simple Tap™ Instructions](#) or Garibaldi software.

While maintaining the set point, the dimming output level will only change a small amount of the output's full range with every received photo sensor telegram. The closed loop maximum output change is set to 10% by default.



Note: *Ensure the wireless photo sensor being used has an update rate that is appropriate to indoor closed loop lighting applications. The period between consecutive telegrams should not exceed 200 seconds.*

The output dimming level will not change when the photo sensor level is within (+ or -) the *closed loop dead-band value* of the *closed loop daylighting set point*. Both the *amount change per telegram* and *dead-band* are configurable parameters accessible using Garibaldi software.


Open Loop Control

Open loop daylighting becomes active when a photo sensor with a maximum detectable range of light greater than 2500 lux is linked to the controller. Open loop daylighting applications are defined when the sensor is monitoring the natural light contribution and is not affected by the controlled fixture's light output.

When the light level monitored by the photo sensor is below the *open-loop maximum output set point*, the dimming output will be at the maximum output level. When the light level is above the *open-loop minimum output set point*, the dimming output will be at the minimum output level.

In the diagram below, the bold blue line indicates the dimming output. The output will begin lowering as the natural light level

increases (green dashed line). When the monitored light level is between the set points it will modulate the dimming output proportionally.

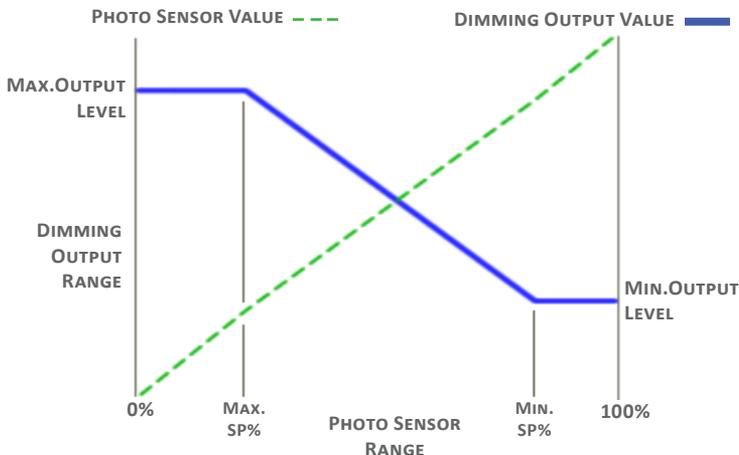

The rate the dimming output will change is defined by the configuration parameter *open loop dimming rate* which defines the time for the dimming to go from 0% to 100% or vice versa.

The *open loop maximum output set point* and *minimum output set point* are adjustable using [Simple Tap™ Instructions](#) or Garibaldi software.

Radio Range Confirmation

The ELED-3 controllers includes patent pending technology that works with all Echoflex sensors equipped with the range confirmation feature to provide visual feedback of a linked sensors signal strength for optimal sensor placement.

To evaluate the radio signal strength, the sensor must be also support the test and be linked to the controller. Check the sensors documentation to find out if it supports radio range confirmation testing. Do not have any repeaters in the controllers vicinity enabled during the test.

The range confirmation test is invoked at the sensor and sends unique telegrams to the controller. The controller will evaluate the signal strength from the sensor and send back a unique telegram containing the strongest signal value received. This value is displayed at the sensor using color LEDs.

Consult the sensor installation guide for more details.

Controller Button Interface



Linking the First Switch

Use this method to link the first switch, this method will link the switch to all three channels. Use the learn button to link additional devices.

1. If the controller already has a sensor linked, press the TEACH button on the linked sensor and proceed to step 2 within 60 seconds.
2. Click the wireless switch paddle ON three times, OFF three times and ON three times sequentially within 5 seconds. The relay will toggle and the red POWER LED will begin a repeating blinking pattern to indicate the linked switch, see the section on LED blink codes.

LEARN button

The LEARN button is used to link switches or sensors to the controller, the Learn LED and Power LED are tricolor and indicate which channel is in Learn mode. In Channel 1 learn mode the learn LED will be red and the power LED will be toggling red. In Channel 2 learn mode the learn LED will be green and the power LED will be toggling green. In Channel 3 learn mode the learn LED will be blue and the power LED will be toggling blue.

1. Press the button marked LEARN for a half second. In link mode the LEARN LED will stay ON and the POWER LED will toggle every two seconds. The LEDs will be a color that correlates to the channel (Red=CH1; Green=Ch2; Blue=CH3)
2. When linking a wall switch, press the switch paddle ON three times. If linking a sensor, press the sensor's TEACH or LINK button, refer to the sensor's documentation. Occupancy sensors will be linked to all channels regardless of which channel's link mode the controller is in. Photo sensors can only be linked while in channel 1 learn mode or channel 2 learn mode. Photo sensors will be linked to both channels 1 and 2 regardless of which of these learn modes the controller is in. The POWER LED will remain lit for four seconds while it links the new device. It will resume toggling allowing you to link another device up to a total of twenty devices.



Note: *Linking a switch or sensor that is already linked to a controller, will remove or unlink it from the controller.*

To exit link mode, press the LEARN button on the controller again for a half second. Link mode will time out after no activity in thirty seconds.

CLEAR button

Using the CLEAR button can reload the controller to the factory pre-commissioned settings with linked devices OR it can load the factory default parameters and remove all linked devices.

- To return the controller to the factory pre-commissioned state, press the CLEAR button until the red POWER and green LEARN LEDs start blinking, approximately 5 seconds. Release the button and the red POWER led will begin blinking indicating the factory commissioned pre-linked devices.
- To completely CLEAR the controller back to factory default settings removing any linked devices, press the CLEAR button until the red POWER and green LEARN LEDs come on solid, about 15 seconds. The POWER led will stay ON solid indicating the factory default state.

Power LED and Learn LED

The Power LED provides information on the number and type of linked devices to the controller. If the controller was factory pre-commissioned, upon power up it will immediately begin blinking the red POWER LED based on the type and count of linked devices. The type is indicated by long blinks followed by short blinks counting the number of devices linked. This pattern will repeat after a short pause. Refer to [LED Blink Codes and Operation in Appendix A](#).

Disabling the User Interface LEDs

The LEDs can be disabled by adjusting a configuration parameter using Garibaldi software. The variable is a timer in seconds. If disabled, the LEDs will illuminate for the configured time when either controller button is pressed, when in link mode or if the remote management Action command is used to toggle the relay.

Configuring the Controller

There are two methods of configuring parameters in the controller.

1. Simple Tap™



Note: *Simple Tap™ is a quick method of changing a parameter's setting, one at a time.*

2. Garibaldi Commissioning Software (not covered in this guide)



Note: *Contact Echoflex Solutions for more information on Garibaldi software.*

Simple Tap™ Instructions

Simple Tap™ uses the switches and sensors that are linked to the controller to set the associated configuration parameters. You must be able to access the sensor's teach button and/or the switches to perform Simple Tap™.

If the sensor is linked to multiple controllers and you do not want to make changes to all, turn the controllers relay off (lights off) to ignore the Simple Tap™ changes.

Simple Tap™ allows you to:

- *Enable/Disable the Repeater Function*
- *Enable/Disable the Status Telegram*
- *Set the Partial-ON and Partial-OFF value and Enable/Disable the Partial-ON Partial-OFF features*
- *Set the Occupancy Sensor Auto-OFF timer*
- *Set the Closed Loop Daylighting Set Point*
- *Set the Open Loop Daylighting Set Point*

Enable/Disable the Repeater Function

Enabling the repeater function will repeat received telegrams when:

- the telegram has not been previously repeated.
- in the case of dual hop repeating, have been repeated once previously

This sequence requires access to the controller. The *repeater function* can be enabled/disabled by accessing the controller's buttons and supports single and dual hop repeating.

1. Press the CLEAR button and hold
2. Quickly tap the LEARN button;
 - once to *disable repeating*
 - twice to *enable single hop repeating*
 - three times to *enable dual hop repeating*
3. Release the CLEAR button. The green LEARN and red POWER LEDs will blink the corresponding value of the LEARN button presses.

Enable/Disable the Status Telegram

The controller can broadcast a telegram per EEP: A5-11-01 *Status Feedback Telegram*. The telegram will broadcast every 100 seconds. The *status telegram* can be enabled/disabled by accessing the controller buttons.

1. Press the LEARN button and hold, quickly tap the CLEAR button once to disable, twice to enable.
2. Release the LEARN button. The green LEARN and red POWER LEDs will blink the corresponding value of the CLEAR button presses.

Setting Partial-ON

When only occupancy sensors are linked to the controller, *partial-ON* will be enabled allowing the sensor to automate the lights both ON and OFF for all three channels. Partial-ON is enabled or disabled concurrently for all channels of the controller. Each of the three channels has separate configuration parameters for the *partial-ON level*. The dimming output for the ON action will adjust to the *partial-ON dimming level* (default 100%). Partial-ON can also be enabled for applications when switches are linked (Partial-ON is disabled by default when one or more switches are linked to the controller).

To adjust the partial-ON level and to enable this feature follow the steps below.

1. An Echoflex light switch must be linked to the channel to set the

partial-ON level (temporarily if occupancy sensor only application)
- see "LEARN button" on page 10 for linking and unlinking information.

2. With the light ON and using a linked switch, dim the lights to the desired *partial-ON* level for the channel.
3. Press the sensors TEACH Button once
4. Within 5 seconds of pressing the TEACH button click the switch ON 4 times to **enable** *partial-ON* and set the level for the channel. The 2 other channels will have a *partial-ON* level of 100% until their levels are adjusted.)
5. Repeat the process for the other 2 channels to adjust their *partial-ON* level if required.

For *partial-ON* **disable**: Click the switch 3 times ON followed by a single OFF within 5 seconds of pressing the TEACH button on a linked occupancy sensor. **Note**: this will disable *partial-ON* for all 3 channels.

Setting Partial-OFF

When the application requires the lights to remain ON during vacant periods but at a dimmed level (*partial-OFF*), the *partial-OFF dimming level* is used. Setting the *partial-OFF* level and enabling the feature affects all three channels. The default *partial-OFF* level is 10%. *Partial-OFF* is disabled by default.

To adjust the *partial-OFF* level and to enable this feature follow the steps below.

1. An Echoflex light switch must be linked to the channel to set the *partial-OFF* level (temporarily if occupancy sensor only application)
- see "LEARN button" on page 10 for linking and unlinking information.
2. With the light ON, and using a linked switch, dim the lights to the desired *partial-OFF* level for the channel.
3. Press the sensors TEACH Button once
4. Within 5 seconds of pressing the TEACH button click the switch OFF 3 times and ON once to **enable** *partial-OFF* and set the level for the channel. The 2 other channels will have a *partial-OFF* level of 10% until their levels are adjusted.
5. Repeat the process for the other 2 channels to adjust their *partial-OFF* level if required.

For *partial-OFF* **disable**: Click the switch 4 times OFF within 5 seconds of pressing the TEACH button on a linked occupancy sensor. **Note**: this will disable *partial-OFF* for all 3 channels.

Set the Occupancy Sensor Auto-OFF timer

1. With the light on, tap the occupancy sensor's TEACH button three times and the relay will blink the light once to acknowledge.
2. Tap the TEACH button again using the table below to match the desired timer period with the total button taps. After the last button press, the relay will blink the light an additional set number of times based on the setting chosen and then return to normal operation.

Simple Tap Occupancy Timer Values

Total Taps	Occ. Sensor Timer	Additional Blinks
3 taps*	0 sec.	1 blink
4 taps	5 min.	2 blinks
5 taps	10 min.	3 blinks
6 taps	15 min.	4 blinks
7 taps	20 min.	5 blinks
8 taps	25 min.	6 blinks

* uses the sensor's timer



Note:

When setting the timer to 15 minutes, the light will blink 5 times total - once on the third press then 4 more after the last button press

Save State

The controller will save its state when power is cycled. The *save state function* can be overridden with a value that will be used to recall a particular relay state / dimming output value after a power cycle. An override enable flag and an override value can be set with Garibaldi Commissioning Software

Set the Closed Loop Daylighting Set Point

A light sensor must be linked to the controller plus a switch.



Note:

This process is best performed when there is little or no natural light; either close the blinds or complete this step at night

1. With the light on and using a hand-held photometer to measure the light on the task plane, adjust the light level from the fixture using the switch until it matches the target light level.
2. Tap the light sensor's TEACH button 3 times to set the daylight harvesting parameters to closed loop function. The light will blink once to acknowledge the change.
3. Move away from the sensor so your shadow does not affect the light level the sensor records. The light will blink once again after a pause when receiving the next telegram from the sensor. The pause may take up to 150 seconds. After blinking, the controller will return to normal operation

Set the Open Loop Daylighting Set Point

A light sensor must be linked to the controller.

This process adjusts the *open loop maximum output dimming set point* and the *open loop minimum output dimming set point*. Both set points are also configurable using Garibaldi software.



Note: *The set points are measured in percentage of the photo sensor's full scale range.*

1. With the light on, tap the light sensor's TEACH button three times. The light will blink once.
2. You can tap the TEACH button again referring to the tables below to set the open loop set points. Tapping the TEACH button increments the row selected in the table.
3. The light will be blinking according to the level set to confirm the change after five seconds and return to normal operation.

Daylighting Set Points - Open Loop Dimming

Sensor Range of > 2500 lux to < 11000 lux

Taps	Max. Output SP	Min. Output SP	Light Blinks
0 taps	20%	100%	1 blinks
1 taps	30%	100%	2 blinks
2 taps	40%	100%	3 blinks
3 taps	50%	100%	4 blinks
4 taps	60%	100%	5 blinks

Daylighting Set Points - Open Loop Dimming

Sensor Range of > 11000lux

Taps	Max. Output SP	Min. Output SP	Light Blinks
0 taps	5%	30%	1 blinks
1 taps	10%	35%	2 blinks
2 taps	15%	40%	3 blinks
3 taps	20%	50%	4 blinks
4 taps	25%	55%	5 blinks

This concludes the configuration directions for the controller.

Appendix A

LED Blink Codes and Operation

The tables below describe the LED activity & associated mode of the controller.

If the controller was factory pre-commissioned, upon power up it will immediately begin blinking the red POWER LED based on the type and count of linked devices. The type is indicated by long blinks followed by short blinks counting the number of devices linked. This pattern will repeat after a short pause.

The table below describes the number of LED blinks for each device type.

POWER LED Blink Codes

**Channel 1 links are displayed with red LED blinks.
Channel 2 links are displayed with green LED blinks.
Channel 3 links are displayed with blue LED blinks.**

Factory Default	ON Solid - Red
switch(es)	1 long blink followed by short blinks counting switches
occupancy sensor(s)	2 long blinks followed by short blinks counting sensors (linked to all channels regardless of link channel)
photo sensor(s)	3 long blinks followed by short blinks counting sensors (Only CH 1 & CH 2 - Linked to both CH1 & CH 2)
central command	4 long blinks followed by short blinks counting devices
demand response	5 long blinks followed by short blinks counting devices

Operating Mode and LED Activity

Mode	Green LEARN LED	POWER LED: Red-CH1; Green-CH2; Blue-CH3	Relay/Light
LINK mode	ON	Toggle	Toggle
Storing ID	ON	ON 4 sec.	ON 4 seconds
Clearing ID	ON	OFF 4 sec.	OFF 4 seconds
Factory Default	OFF	ON solid	ON

The LEDs can be disabled by adjusting a configuration parameter using Garibaldi software. If disabled, the LEDs will illuminate for a

brief period of time when either controller button is pressed, when in link mode or if the remote management Action command is used to toggle the relay.

Status Feedback Telegram

EEP:A5-11-01 All Channels

Channel 1 uses radio ID of controller (unique ID)

Channel 2 uses unique ID * 4 bitwise "or" with 0xFF800000 and add 1 (Channel 2 ID)

Channel 3 uses Channel 2 ID + 1

DB_3 Illumination 0-100%, linear n=0...255

DB_2 Illumination Set Point Min. ... Max., linear n=0...255

DB_1: Dimming Output Level Min. ... Max., linear n=0...255

DB_0.BIT_7: Repeater 0b 0 disabled, 0b1 enabled

DB_0.BIT_6: Power Relay Timer 0b0 disabled

DB_0.BIT_5: Daylight Harvesting 0b0 disabled 0b1 enabled

DB_0.BIT_4: Dimming 0b1 dimming load

DB_0.BIT_3: Learn button 0b0 Teach-in telegram 0b1 Data telegram

DB_0.BIT_2: Magnet Contact 0b0

DB_0.BIT_1: Occupancy 0b0 unoccupied 0b1 occupied

DB_0.BIT_0: Power Relay 0b0 off 0b1 on

Notes:

- The Illumination field will always be 0 if no photo sensors are linked. The illumination field will always be 0 for channel 3. If there is a photo sensor linked to the ELED3 the illumination field will be 0-100% of the range of the linked photo sensor, rather than 0-510lx..
- The Illumination Set Point field will always be 0 if no photo sensors are linked. The illumination set point field will always be 0 for channel 3. The illumination set-point field will correspond to the closed-loop set point, scaled so that 0 is 0% and 255 is 100%.
- The Dimming Output Level field will be 0 if a given channel is in its 'off' state; otherwise it will be the dimming output level scaled so that 0 is the minimum dimming voltage and 255 is the maximum dimming voltage.
- The Repeater bit will be 0 if the repeater is disabled, and 1 if the repeater is set to single-hop mode or dual-hop mode.
- The Power Relay Timer bit will always be 0.
- The Daylight Harvesting bit will be 1 if one or more photo sensor is linked and 0 otherwise.
- The Dimming bit will always be 1.
- The LRN bit will be 1 (except for teach messages).
- The magnet contact bit will always be 0.

- If there are any occupancy sensors linked and the controller state is occupied the Occupancy bit will be 1; otherwise it will be 0.
- If the channel is in its 'on' state the Power Relay bit will be 1, otherwise it will be 0.

Agency Listings and Regulatory Statements

Safety

UL Listed Component
 Conforms to UL Standard 60730
 Conforms to UL Standard 924
 Certified to CAN/CSA Std. E60730
 UL 2043 Plenum rated

Energy Code Compliance

California Energy Commission Title 24
 Washington State Energy Code
 ASHRAE 90.1-2016
 IECC 2015



FCC Part 15.231 : Contains FCC ID: SZV-STM300U
 IC RSS-210FCC Part 15.231 : Contains FCC ID: SZV-STM300U
 The enclosed device complies with Part 15 of the FCC Rules.
 Operation is subject to the following two conditions:
 (i.) this device may not cause harmful interference and
 (ii.) this device must accept any interference received, including interference that may cause undesired operation.

Safety Standards Load Ratings

Electronic Ballast or LED Driver	20A @ 120 to 277VAC
----------------------------------	---------------------



Echoflex Solutions

38924 Queens Way, Unit #1, Squamish, BC, V8B 0K8, Canada ■ +1 778-733-0111
 echoflexsolutions.com ■ 8DC-5810 Rev 1.2 ■ 11/19