


EMERGENCY NEUTRAL
EMERGENCY 120-277V

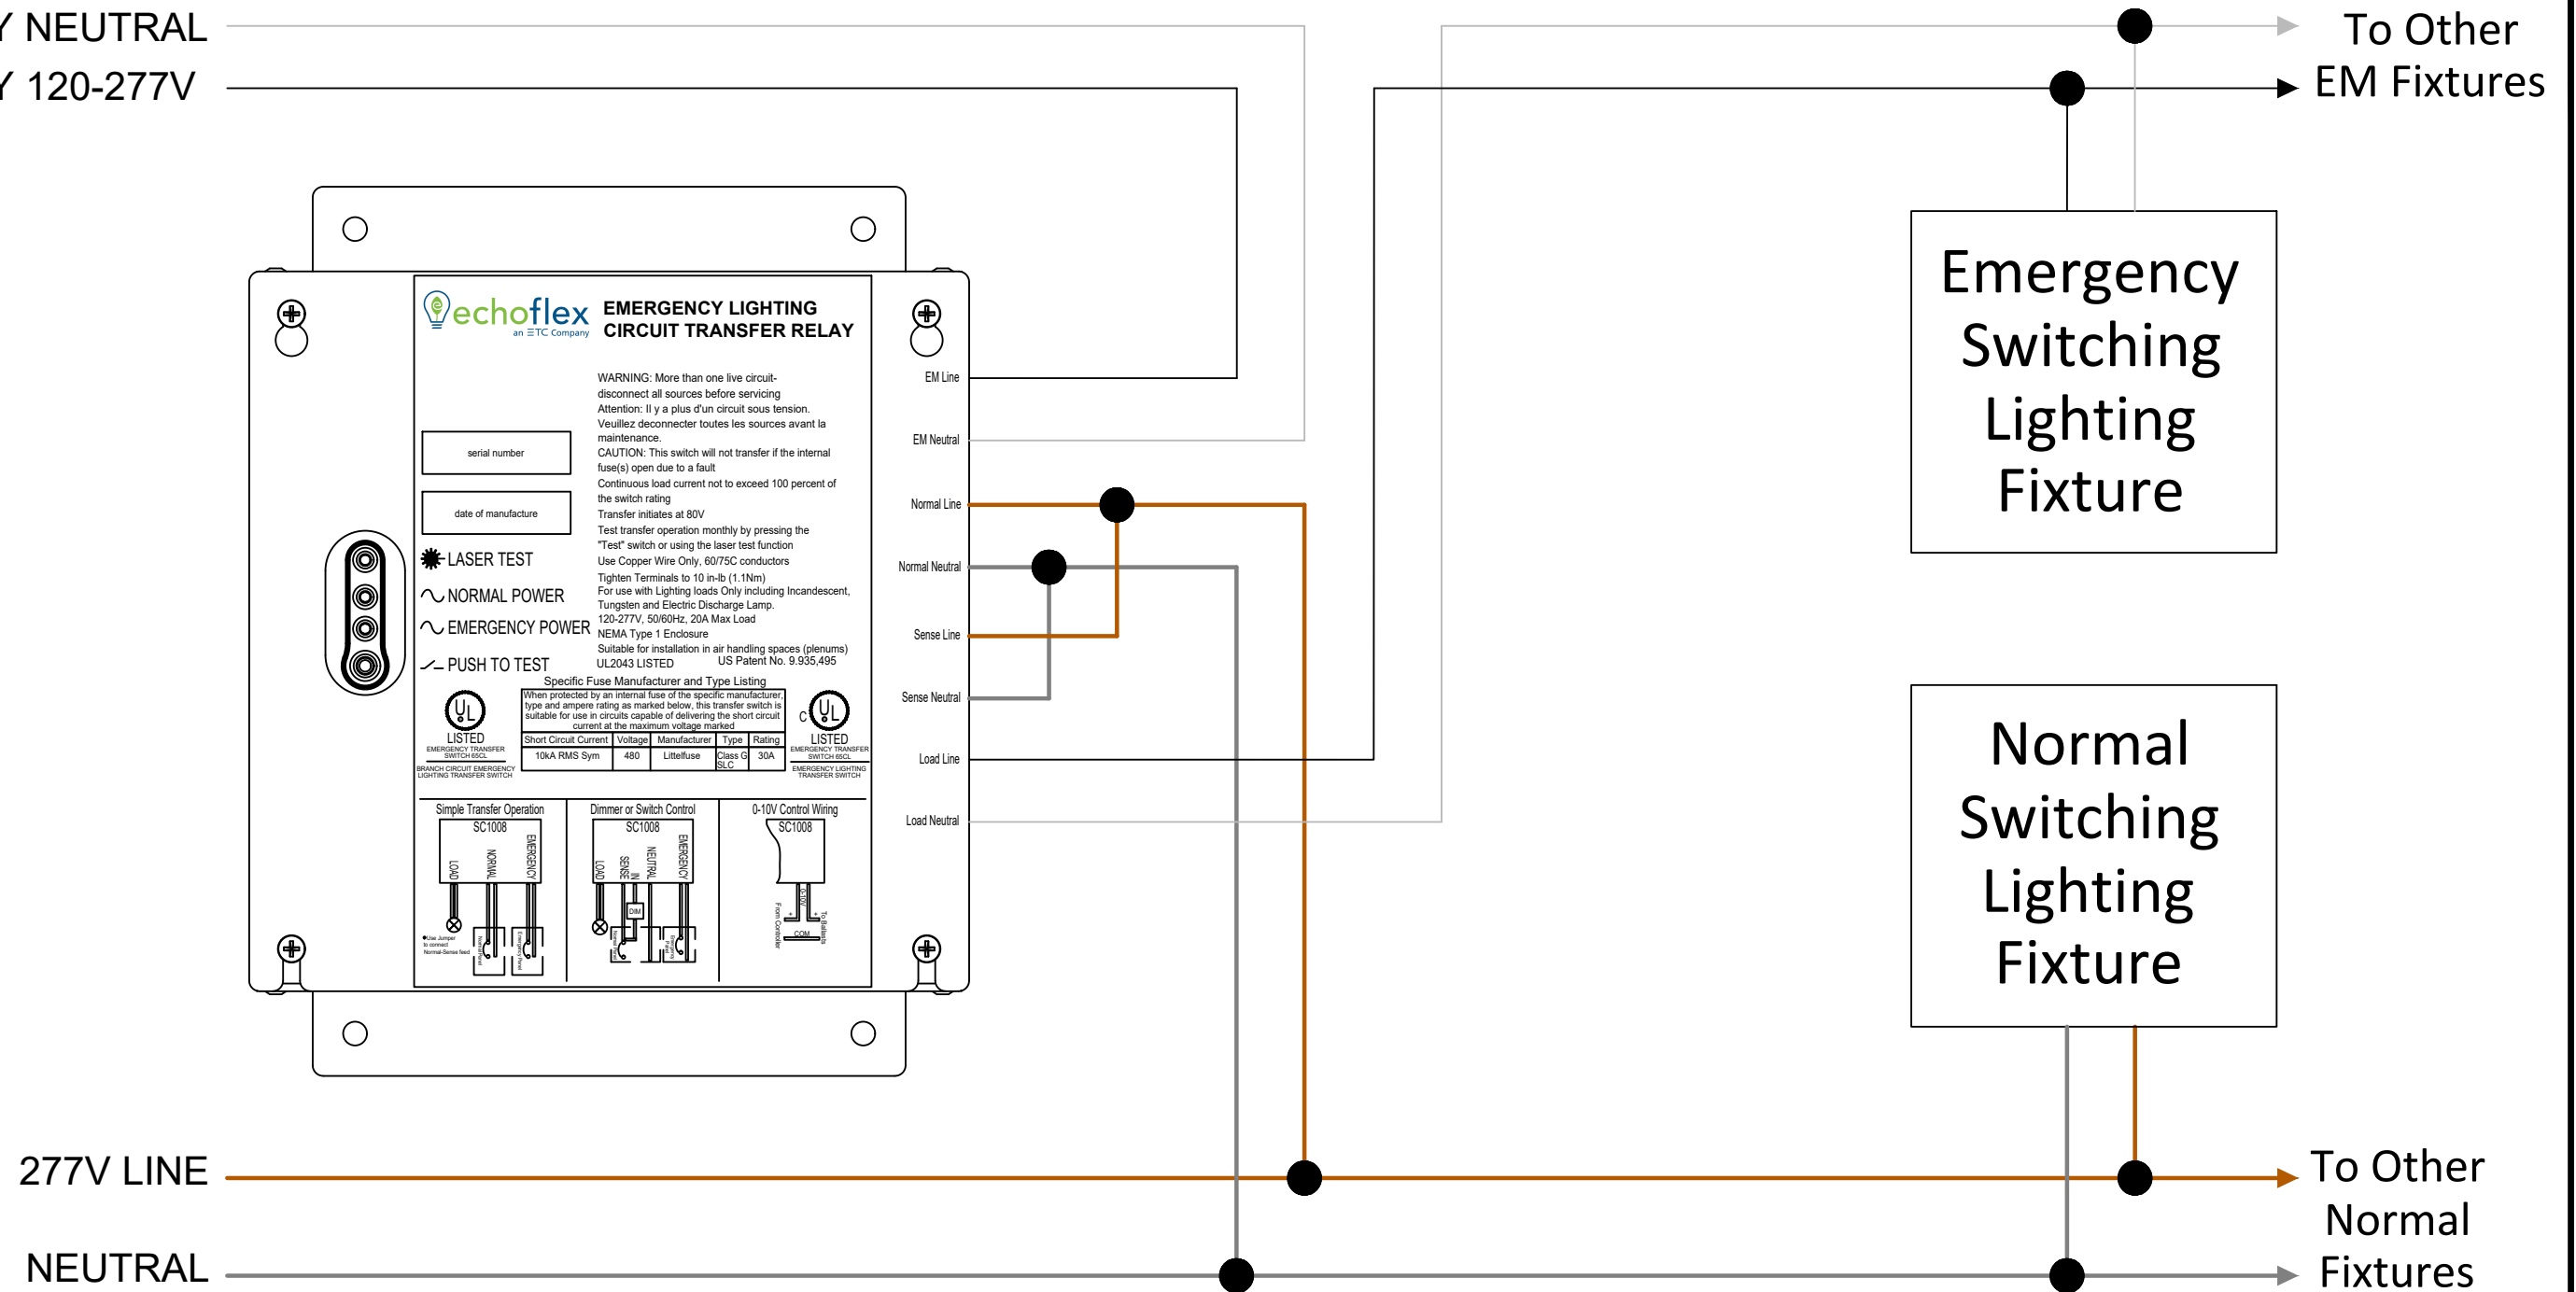

ELCTR-20-1P

- UL1008 listed for NEC 700, 701 emergency lighting applications
- Single power input @ 120-277V, 20A Maximum
- Control Bypass relay for 0-10V or DALI controlled circuits
- Field-selectable dry contact fire alarm input
- Front panel accessible testing options and status indicators
- Follow all local and National Wiring Code Regulations

DEVICE: ELCTR-20-1P		Echoflex Solutions, Inc. 38924 Queens Way Unit #1 Squamish, British Columbia Canada V8B 0K8 Phone: 1 (778) 733-0111 Toll Free: 1 (888) 324-6359 Fax: 1 (604) 815-0078 echoflexsolutions.com
MAXIMUM LOAD RATING: 20A @120/277V		
PART #: 7180A1220		
ELECTRICAL CONNECTION: WIRE LEADS 250mm (10.0")		
TITLE: Emergency Lighting Circuit Transfer Switch	DRAWING NO: 9DC-9743	UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN MILLIMETERS.

