

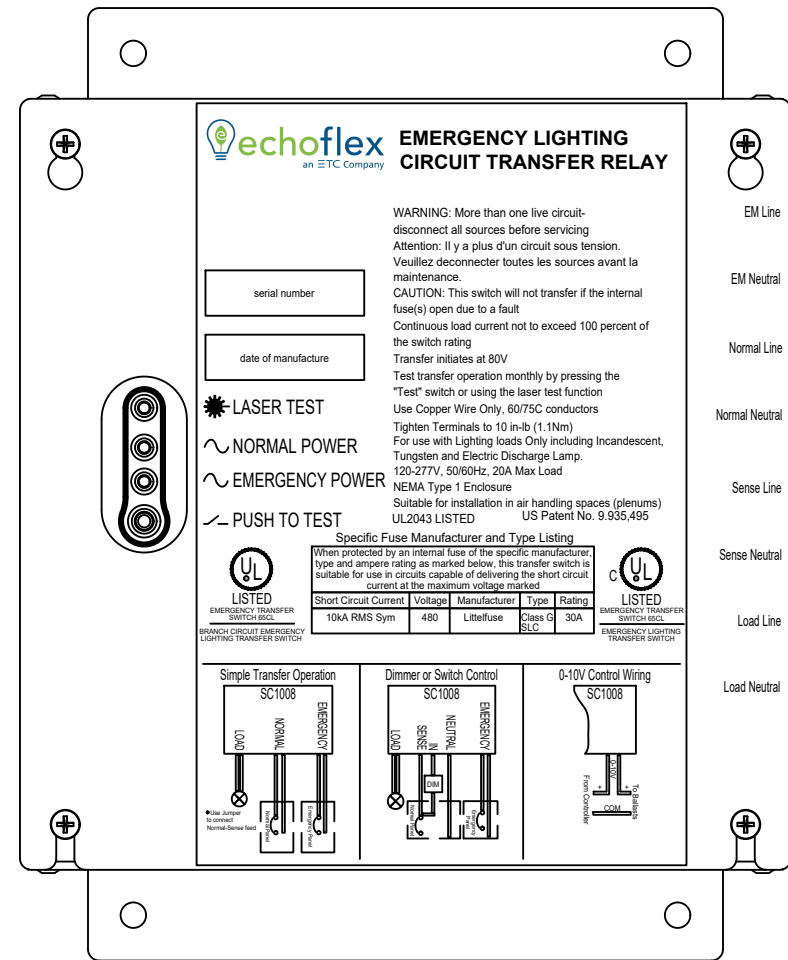


EMERGENCY NEUTRAL
EMERGENCY 120-277V

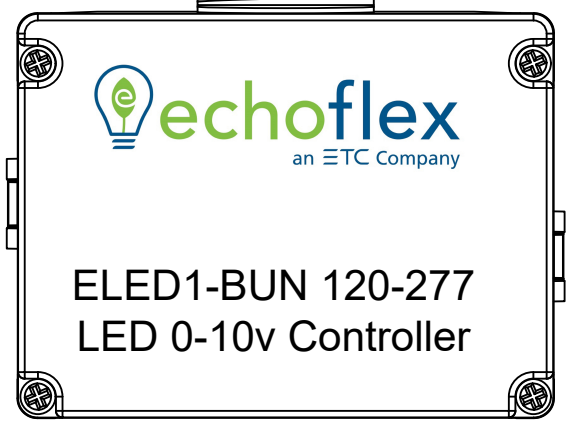

120-277V LINE
NEUTRAL

EM Line
EM Neutral
Normal Line
Normal Neutral
Sense Line
Sense Neutral
Load Line
Load Neutral

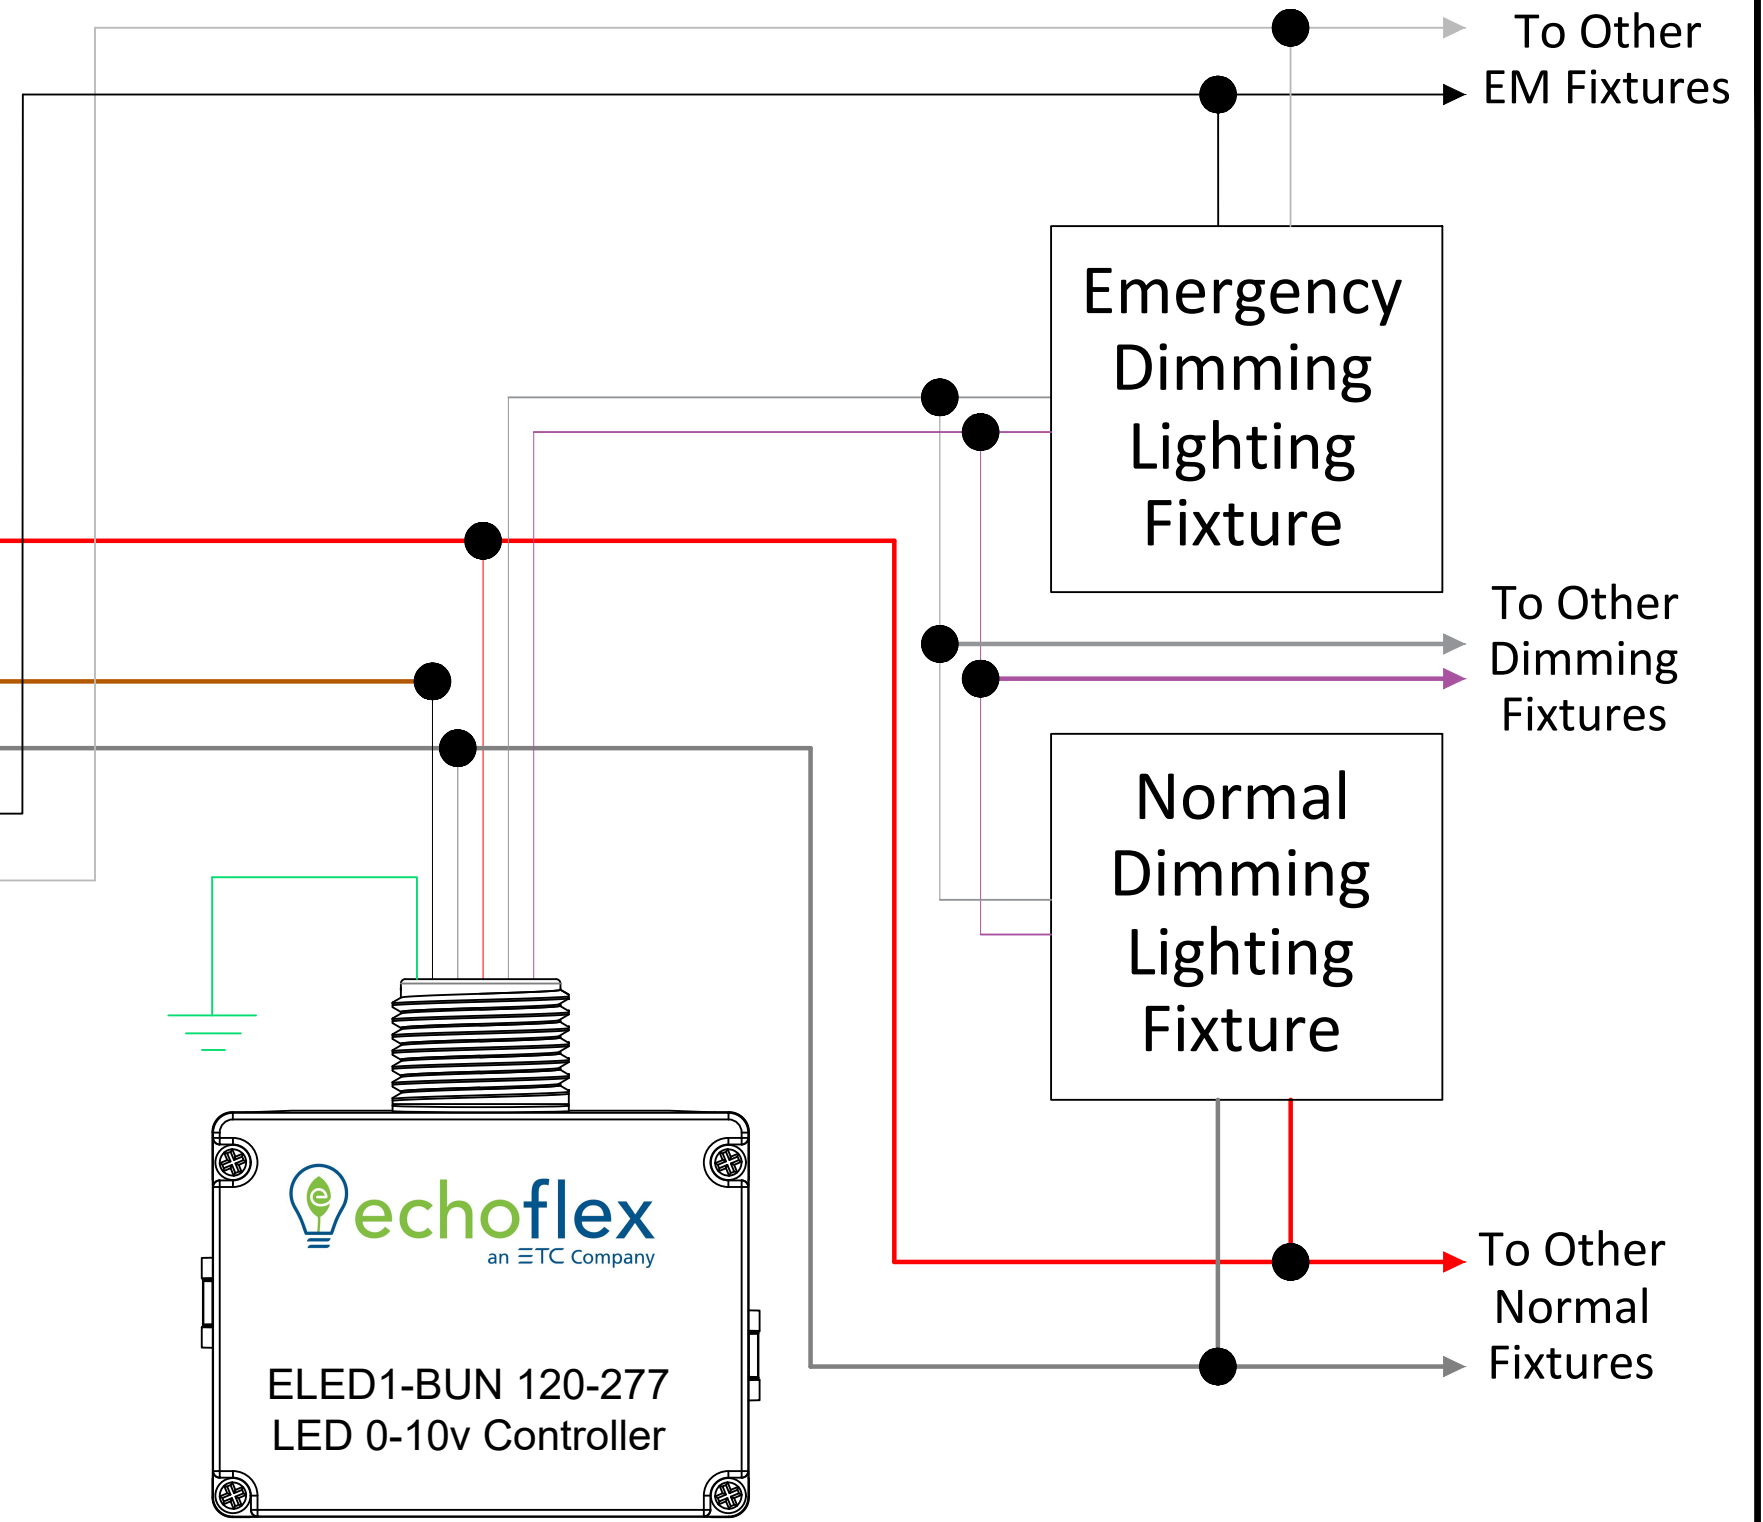

ELCTR-20-1P

- UL1008 listed for NEC 700, 701 emergency lighting applications
- Single power input @ 120-277V, 20A Maximum
- Control Bypass relay for 0-10V or DALI controlled circuits
- Field-selectable dry contact fire alarm input
- Front panel accessible testing options and status indicators
- Follow all local and National Wiring Code Regulations

DEVICE: ELCTR-20-1P with ELED1	
MAXIMUM LOAD RATING: ELCTR=20A @120/277V - ELED1=11.5A @ 120/277V	
PART #: ELCTR-7180A1220 - ELED1-8189A1125	
ELECTRICAL CONNECTION: WIRE LEADS 250mm (10.0")	
TITLE: Emergency Lighting Circuit Transfer Switch with ELED1 0-10V LED Controller	DRAWING NO: 9DC-9767

Echoflex Solutions, Inc.
 38924 Queens Way Unit #1
 Squamish, British Columbia
 Canada V8B 0K8
 Phone: 1 (778) 733-0111
 Toll Free: 1 (888) 324-6359
 Fax: 1 (604) 815-0078
 echoflexsolutions.com

UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN MILLIMETERS.