

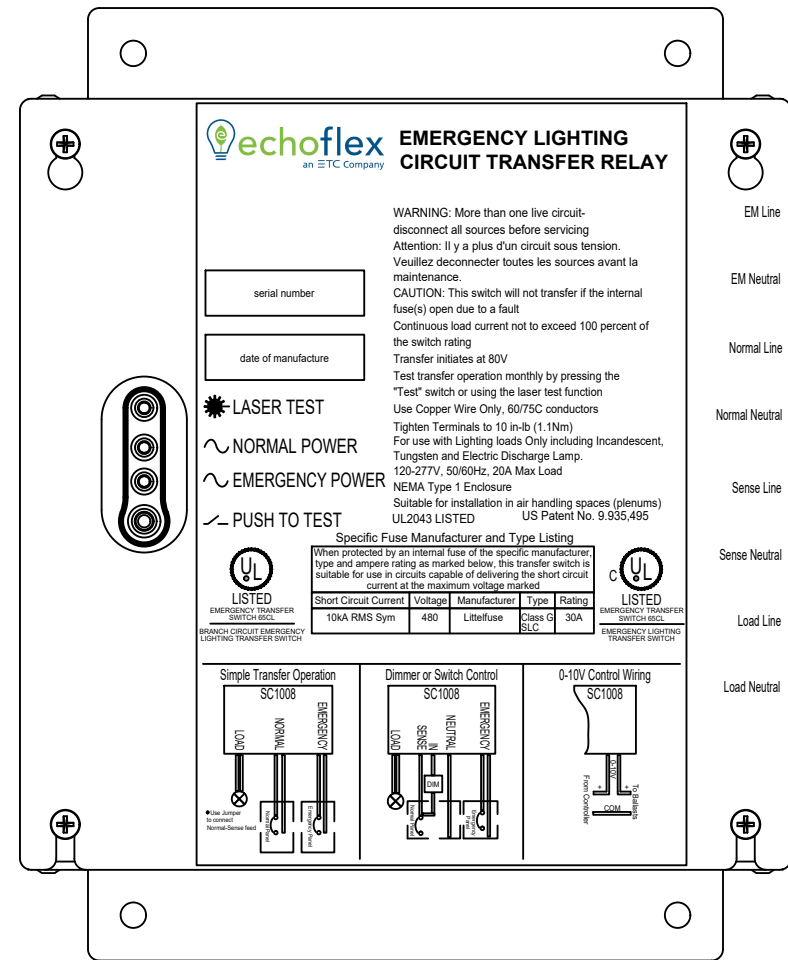


EMERGENCY NEUTRAL  
EMERGENCY 120-277V

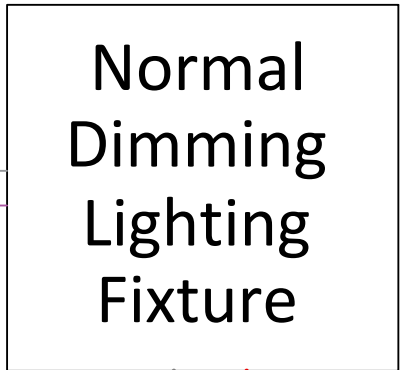

277V LINE  
NEUTRAL

EM Line  
EM Neutral  
Normal Line  
Normal Neutral  
Sense Line  
Sense Neutral  
Load Line  
Load Neutral

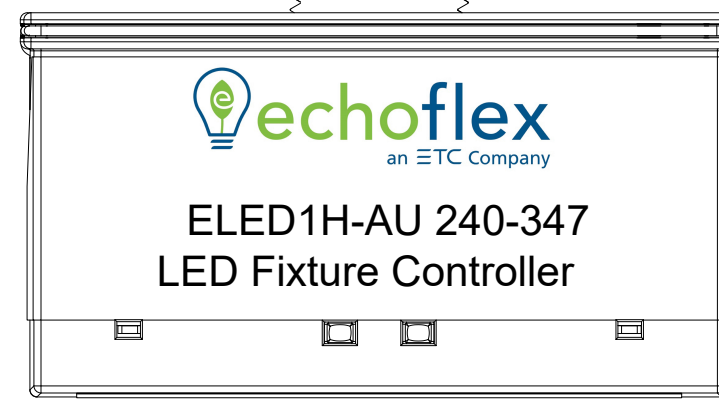

To Other  
EM Fixtures

To Other  
Dimming  
Fixtures

To Other  
Normal  
Fixtures

# ELCTR-20-1P

- UL1008 listed for NEC 700, 701 emergency lighting applications
- Single power input @ 120-277V, 20A Maximum
- Control Bypass relay for 0-10V or DALI controlled circuits
- Field-selectable dry contact fire alarm input
- Front panel accessible testing options and status indicators
- Follow all local and National Wiring Code Regulations

DEVICE: ELCTR-20-1P with ELED1H	
MAXIMUM LOAD RATING: ELCTR=20A @120/277V - ELED1H=20A @ 277V	
PART #: ELCTR-7180A1220 - ELED1H-8189A1148	
ELECTRICAL CONNECTION: WIRE LEADS 250mm (10.0")	
TITLE: Emergency Lighting Circuit Transfer Switch with ELED1H 0-10V LED Controller	DRAWING NO: 9DC-9779

**Echoflex Solutions, Inc.**  
 38924 Queens Way Unit #1  
 Squamish, British Columbia  
 Canada V8B 0K8  
 Phone: 1 (778) 733-0111  
 Toll Free: 1 (888) 324-6359  
 Fax: 1 (604) 815-0078  
 echoflexsolutions.com

UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN MILLIMETERS.