

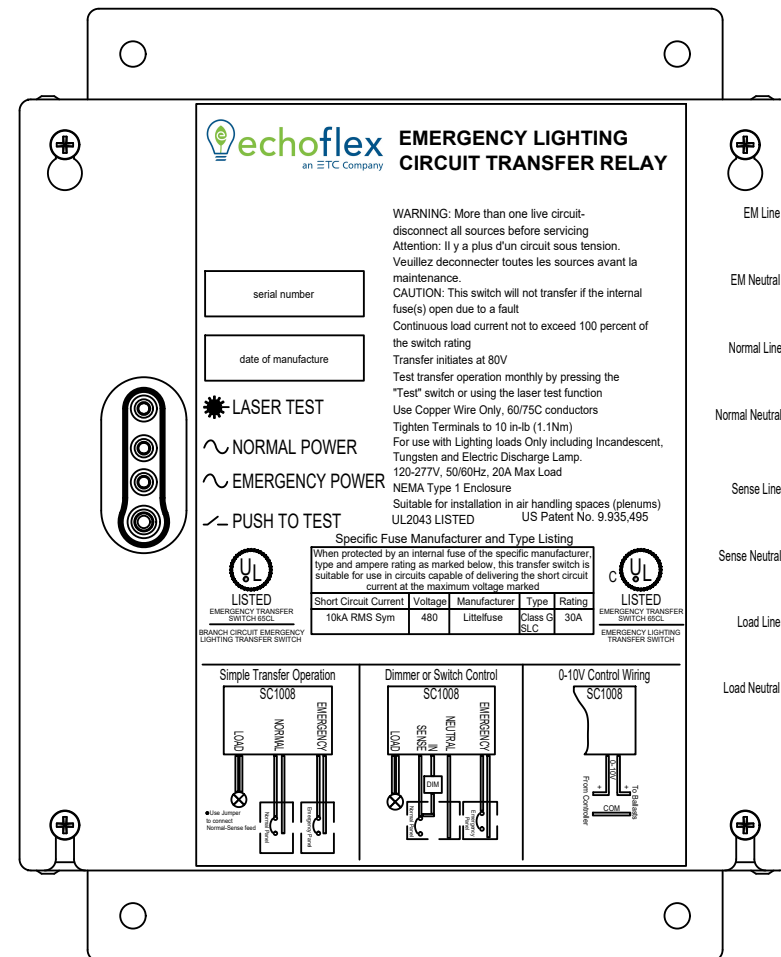


EMERGENCY NEUTRAL  
EMERGENCY 120-277V

To Other  
EM Fixtures

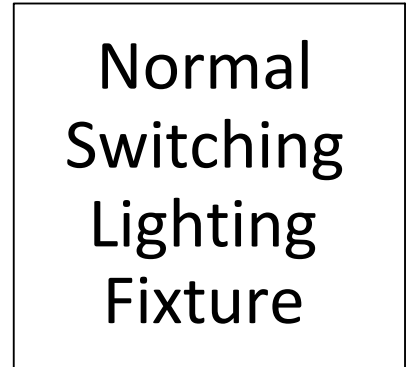

EM Line  
EM Neutral  
Normal Line  
Normal Neutral  
Sense Line  
Sense Neutral  
Load Line  
Load Neutral

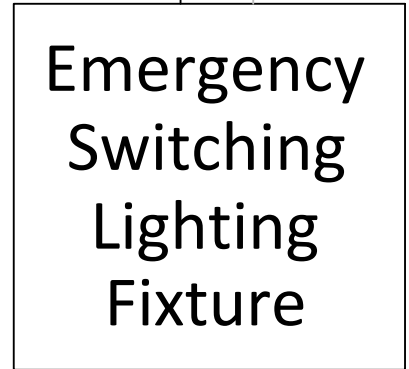

277V LINE  
NEUTRAL

To Other  
Normal  
Fixtures

# ELCTR-20-1P

- UL1008 listed for NEC 700, 701 emergency lighting applications
- Single power input @ 120-277V, 20A Maximum
- Control Bypass relay for 0-10V or DALI controlled circuits
- Field-selectable dry contact fire alarm input
- Front panel accessible testing options and status indicators
- Follow all local and National Wiring Code Regulations

DEVICE: ELCTR-20-1P	
MAXIMUM LOAD RATING: ELCTR=20A @120/277V - Switch=20A @ 120/277V	
PART #: 7180A1210-1	
ELECTRICAL CONNECTION: WIRE LEADS 250mm (10.0")	
TITLE: Emergency Lighting Circuit Transfer Switch with Line Voltage Switch	DRAWING NO: 9DC-9313

**Echoflex Solutions, Inc.**  
 38924 Queens Way Unit #1  
 Squamish, British Columbia  
 Canada V8B 0K8  
 Phone: 1 (778) 733-0111  
 Toll Free: 1 (888) 324-6359  
 Fax: 1 (604) 815-0078  
 echoflexsolutions.com

UNLESS OTHERWISE SPECIFIED - ALL DIMENSIONS ARE IN MILLIMETERS.